


RoHS

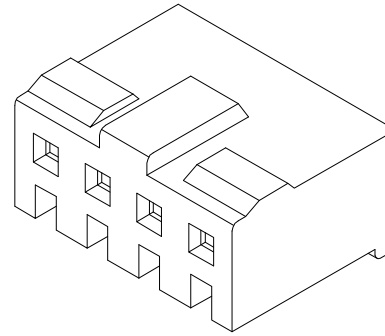

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): Nylon 66 (UL94V-0)
- Color: Brown

Ordering Information

SCT2504H - xx B BN 102

No.of Pins
See Table

Insulation
B=PA66 V0








Color
BN=Brown

| 10 | 22.50 | 25.50 | | | |
|-------|------------|-------|-------|------------|-------|
| 9 | 20.00 | 23.00 | | | |
| 8 | 17.50 | 20.50 | | | |
| 7 | 15.00 | 18.00 | | | |
| 6 | 12.50 | 15.50 | 15 | 35.00 | 38.00 |
| 5 | 10.00 | 13.00 | 14 | 32.50 | 35.50 |
| 4 | 7.50 | 10.50 | 13 | 30.00 | 33.00 |
| 3 | 5.00 | 8.00 | 12 | 27.50 | 30.50 |
| 2 | 2.50 | 5.50 | 11 | 25.00 | 28.00 |
| Poles | A | B | Poles | A | B |
| | Dimensions | | | Dimensions | |

2P,3P

4P~6P

7P~15P

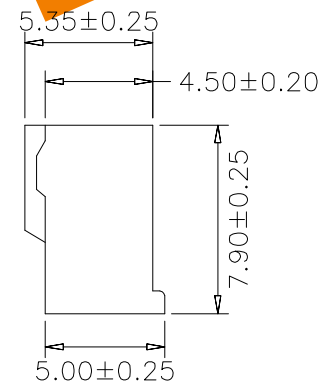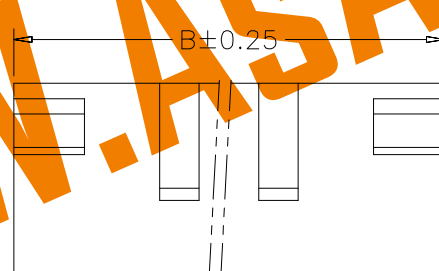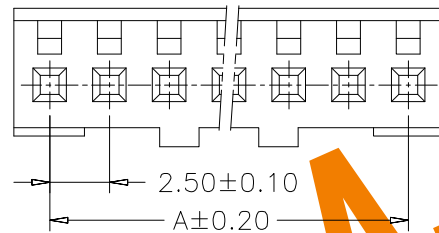

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE | OPERATION | DRAW | SCALE | UNIT | SIZE | SHEET | PROJ. | PART NO. | TITLE: |
|-----|------------|--|--------|---------|-----------|-------|-------|------|------|-------|-------|-------------------|--------|
| A1 | 2021.07.06 | Changed from SCT2504H-xxP to SCT2504H-xxBBN102 | | | X.X | ±0.35 | | mm | A4 | 1/1 | | SCT2504H-xxBBN102 | △ |
| A0 | 2009.10.15 | NEW | | | X.XX | ±0.25 | | | | | | | |
| | | | | | X.XXX | ±0.15 | | | | | | | |
| | | | | | Angle | ± 3' | | | | | | | |
| | | | | | DIM | TOL | | | | | | | |

WWW.ASA-Elec.com

 AsA Electronic Co.

 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02