

RoHS
COMPLIANT

◆ SPECIFICATIONS

- Current rating: 2A AC/DC
- Voltage rating: 100V AC/DC
- Temperature range: -40°C~+105°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 800V AC/minute.
- Contact resistance: 20mΩ/Max.

Material:

Housing: PA9T UL94 V-0, Beige

Pin: Brass

Ear: Brass

Plating: Gold plated or Tin/Matte-Tin plated over Nickel

Suitable: KR2001 series Housing

PART NO:

C2001RS1**11 *** 01RC

02: 2P

16: 16P

R: Reel&Tape
P: bage

11: PA9T Natural


12: PA9T Black

13: LCP Natural

M01: matte-tin

G01: Gold flash

PIN NO.	DIMENSIONS			PIN NO.	DIMENSIONS		
	A	B	C		A	B	C
02P	2.00	8.00	4.80	10P	18.00	24.00	20.80
03P	4.00	10.00	6.80	11P	20.00	26.00	22.80
04P	6.00	12.00	8.80	12P	22.00	28.00	24.80
05P	8.00	14.00	10.80	13P	24.00	30.00	26.80
06P	10.00	16.00	12.80	14P	26.00	32.00	28.80
07P	12.00	18.00	14.80	15P	28.00	34.00	30.80
08P	14.00	20.00	16.80	16P	30.00	36.00	32.80
09P	16.00	22.00	18.80				

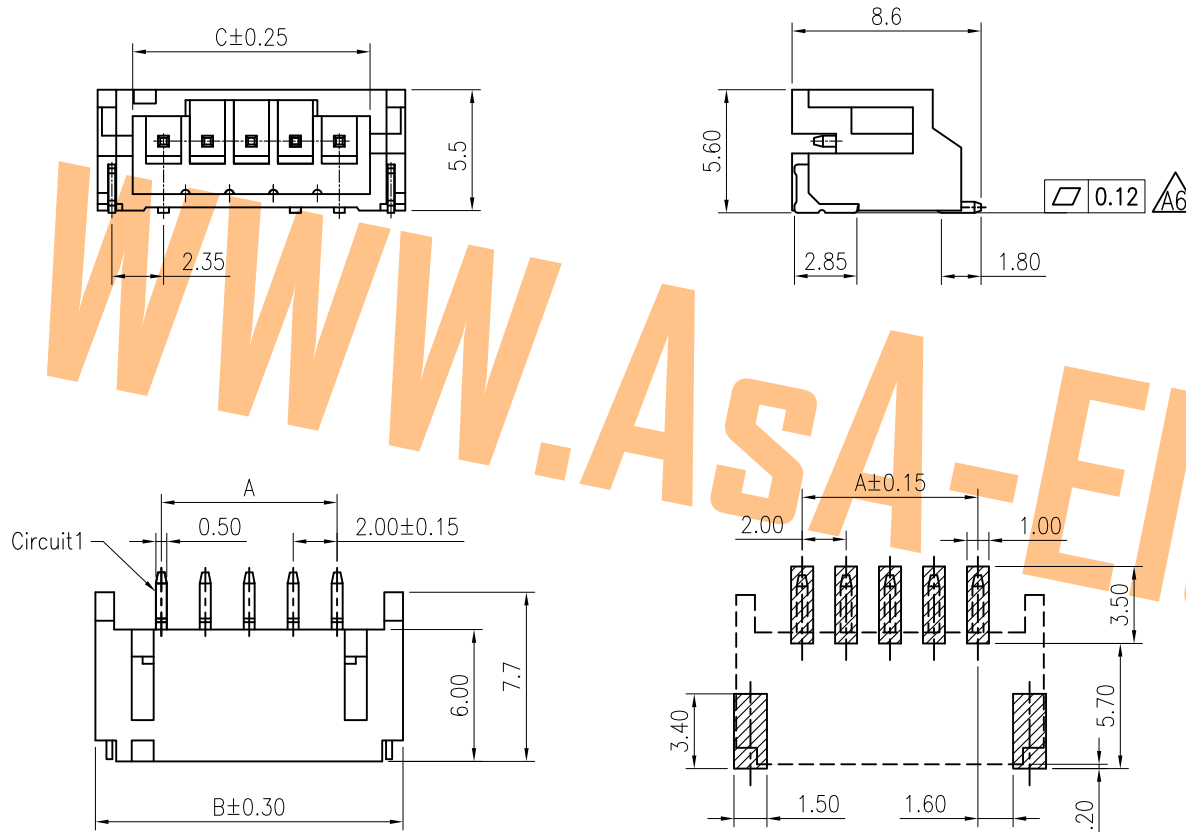

Recommended P.C.B. Layout
Total tolerance: ±0.05mm

AsA Electronic
www.AsA-Elec.com

AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

F		Change flatness tolerance	Shen	2022.03.04	TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±2°	TITLE: PH 2.0 SMT 90° Wafer	DRAWN: 353 2021.09.15	CHECKED:	APPROVED:	PART NO.: C2001RS1*****01RC
		Uniformly arrange the drawings	ZSZ	2021.09.15						
		Correct view	Arvin	2021.03.09						
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE						
	1	2	3	4	UNIT:mm	SCALE:N/A	SHEET:1/1	PROJECTION	REV.:A6	DRAWING NO.:2001WHS01-C-S