

**RoHS**  
COMPLIANT



WWW.AsA-Elec.com

AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

**SPECIFICATIONS**

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material: Nylon 66 UL 94V-0  
Suitable KR1258 series terminal  
Mate with KR1258 series wafer  
Ordering Code:



H25000 \*\*\* 22 01B

No.of Circuits

102:2,116:16

Insulator Material

22:PA66 Beige V0

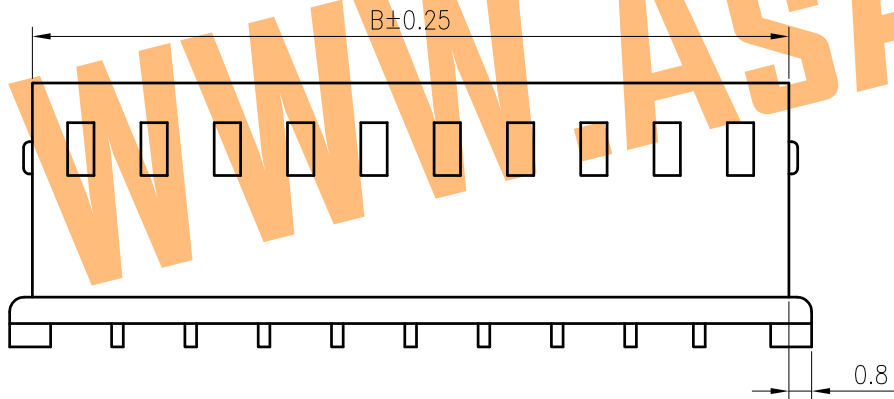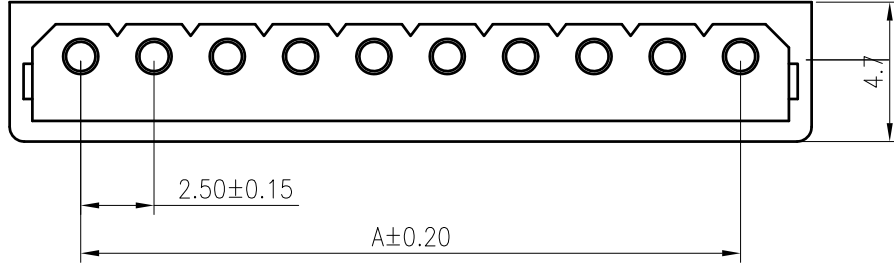

Circuits	Dimensions	
	A	B
2	2.50	5.80
3	5.00	8.30
4	7.50	10.80
5	10.00	13.30
6	12.50	15.80
7	15.00	18.30
8	17.50	20.80
9	20.00	23.30
10	22.50	25.80
11	25.00	28.30
12	27.50	30.80
13	30.00	33.30
14	32.50	35.80
15	35.00	38.30
16	37.50	40.80

				TOLERANCE	TITLE:		DRAWN: Shen 2022.01.08				
				X.X ±0.30	UNIT:mm SCALE:N/A SHEET:1/1 PROJECTION		CHECKED:		PART NO.: H25000***2201B		
				X.XX ±0.20			APPROVED:				
				X.XXX ±0.10			REV.: A3		DRAWING NO.: 2500H101-B-S		
MARK	REVISION	DESCRIPTION	SIGNATURE	DATE	Angle ±2°						
1	2	3	4	5	6	7	8	9			



Uniformly arrange the drawings

Shen 2022.01.08