
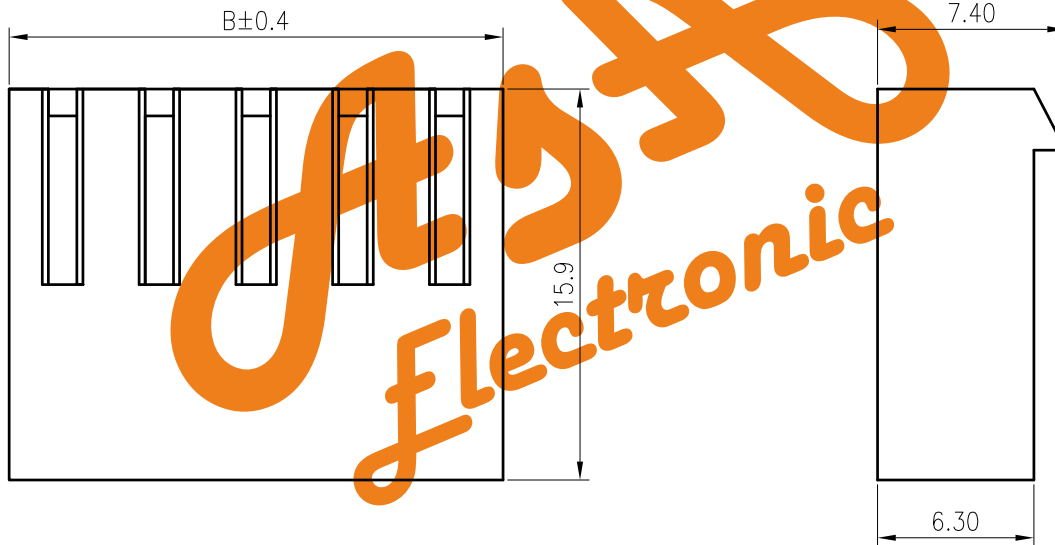
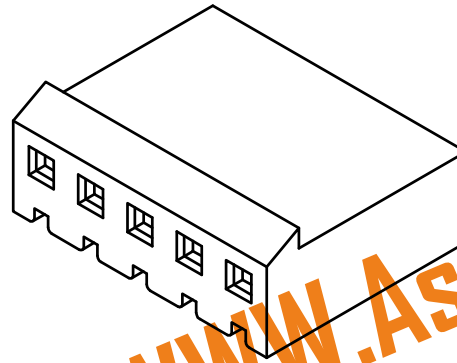


**RoHS**  
COMPLIANT

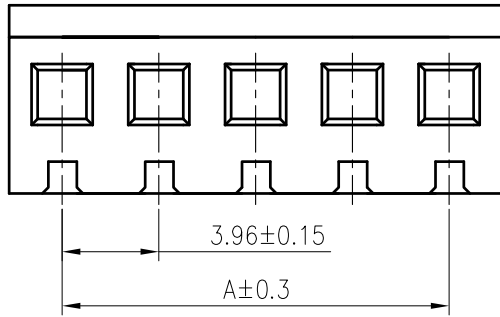


**SPECIFICATIONS**

1. Current rating: 5A AC, DC
2. Voltage rating: 250V AC, DC
3. Temperature range: -25°C ~ + 85°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 1500V AC/ minute.
6. Material: PA66 UL94 V-2

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2	3.96	8.42	8	27.72	32.18
3	7.92	12.38	9	31.68	36.14
4	11.88	16.34	10	35.64	40.10
5	15.84	20.30	11	39.60	44.06
6	19.80	24.26	12	43.56	48.02
7	23.76	28.22			


[WWW.AsA-Elec.com](http://WWW.AsA-Elec.com)  
**AsA Electronic Co.**

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

F	△4			TOLERANCE	TITLE:	DRAWN: <i>Arvin 2020.03.24</i>	
	△3	Uniformly arrange the drawings	ZSZ	X.X ±0.30	MX3.96 Housing	CHECKED:	
	△2	Change the part number and frame format	Arvin	X.XX ±0.20		APPROVED:	
	△1			X.XXX ±0.10			
MARK	REVISION	DESCRIPTION	SIGNATURE	DATE	UNIT:mm	SCALE:N/A	SHEET:1/1
1	2	3	4	5	6	7	PROJECTION 

Angle ±2°