




△ SPECIFICATION
 Current Rating: 3A AC/DC
 Voltage Rating: 250V AC/DC
 Temperature Range: -25°C~+85°C
 Contact Resistance: 10 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Withstanding Voltage: 1000V AC/Minute
 Insulator: PA66(UL94V-0), White
 RoHS Compliant

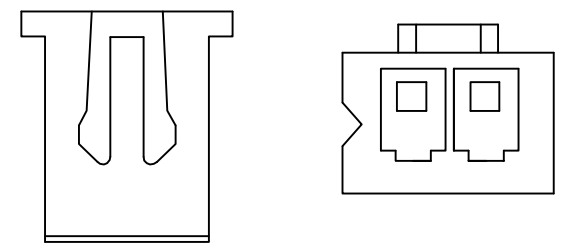

△ 2 Pin

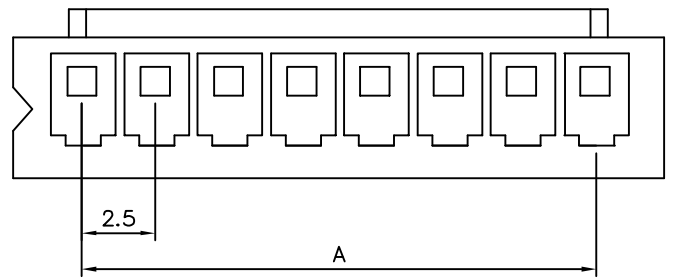

WWW.ASA-Electronic.com

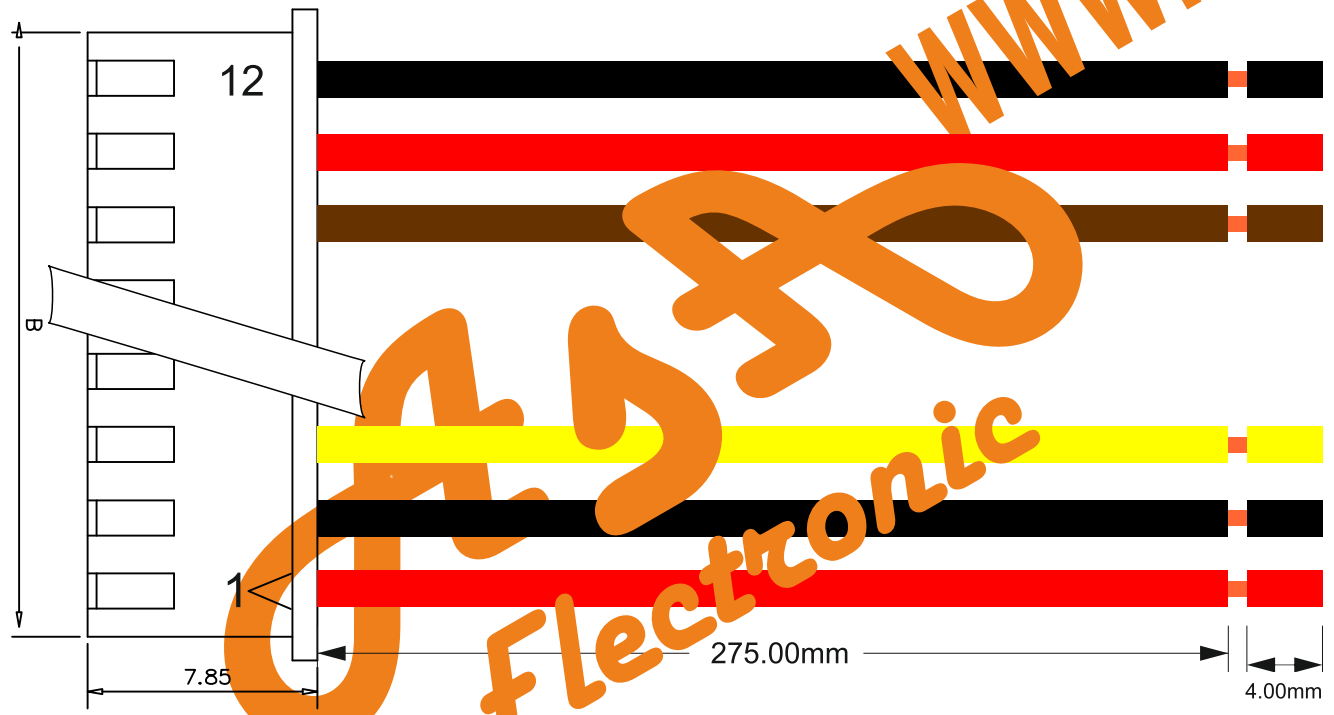

Pin	COLOR	Pin	A	B
1	RED	2	2.50	5.70
2	BLACK	3	5.00	8.20
3	YELLOW	4	7.50	10.70
4	WHITE	5	10.00	13.20
5	GREEN	6	12.50	15.70
6	BLUE	7	15.00	18.20
7	ORANGE	8	17.50	20.70
8	VIOLET	9	20.00	23.20
9	GRAY	10	22.50	25.70
10	BROWN	11	25.00	28.20
11	RED	12	27.50	30.70
12	BLACK	13	30.00	33.20
		14	32.50	35.70
		15	35.00	38.20
		16	37.50	40.70
		20	47.50	50.70

ASA Electronic
 WWW.ASA-Elec.com
 AsA Electronic Co.
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

APPROVED BY		MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 △ .XX ±0.20
CHECKED BY		H.Z		
DRAWING BY		QQJ		
SCALE	NONE	REV.	A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	03/24/2010
△ A1		Modify Data	BECKY	2004/11/19
△ A0		NEW RELEASE		