
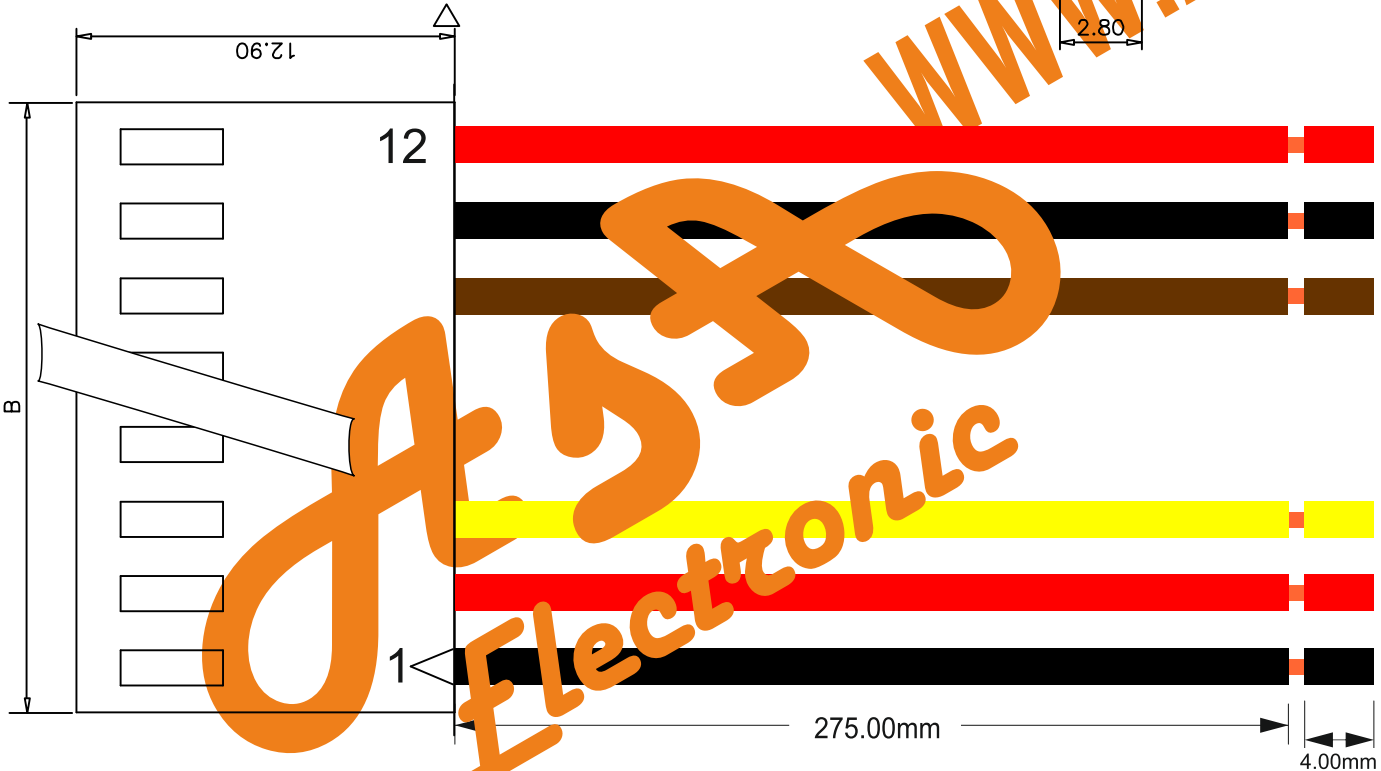
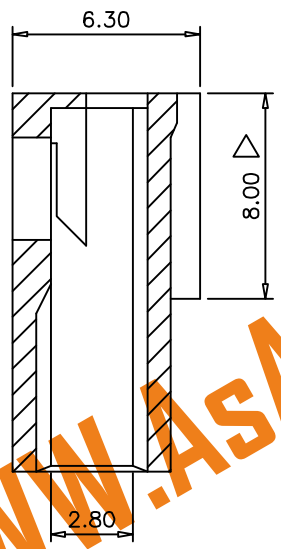


SPECIFICATION
 Current Rating: 3A AC,DC
 Voltage Rating: 250V AC Max.
 Operating Temperature: -25°C~+85°C
 Insulation Resistance: 1000 Megaohms Min.
 Contact Resistance: 20 Milliohms Max.
 Material: PA66(UL94V-2)
 RoHS Compliant

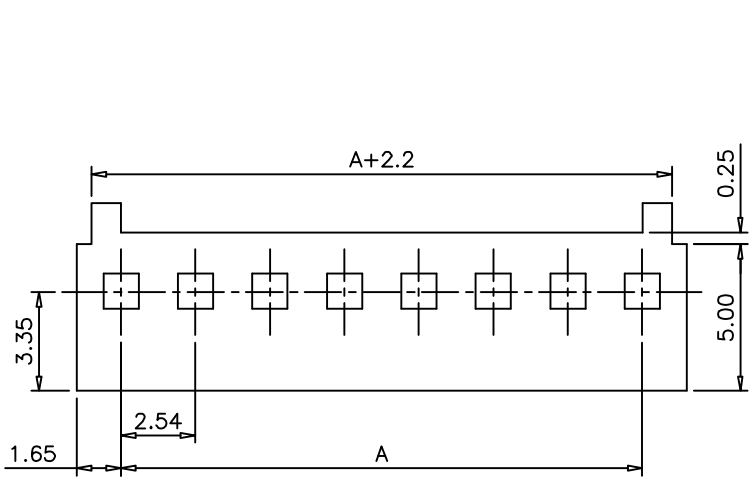

Pin	COLOR	Pin	A	B
1	BLACK	02	2.54	5.64
2	RED	03	5.08	8.16
3	YELLOW	04	7.62	10.72
4	WHITE	05	10.16	13.30
5	GREEN	06	12.70	15.78
6	BLUE	07	15.24	18.40
7	ORANGE	08	17.78	20.80
8	VIOLET	09	20.32	23.50
9	GRAY	10	22.86	26.00
10	BROWN	11	25.40	28.50
11	BLACK	12	27.94	31.00
12	RED	13	30.48	33.50
		14	33.02	36.00
		15	35.56	38.50
		16	38.10	41.20
		17	40.64	43.60
		18	43.18	46.32
		19	45.72	48.80
		20	48.26	51.34

AsA Electronic
 WWW.AsA-Elec.com
 AsA Electronic Co.
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.35 .XX ±0.25 ANG.
01931		EMILY		
		CHECKED BY		
		H.Z		
		DRAWING BY		UNIT mm
		SONG		
SCALE	NONE	REV.	B3	

NO.	REV.	REVISIONS	CHK	DATE
B3		Add Dim.	HZF	09/09/2011
B2		Modify SPEC.	HZF	12/26/2008
B1		ADD DIM 8.00	HZF	07/21/2008
B0		NEW RELEASE	BECKY	07/19/2005