



5264

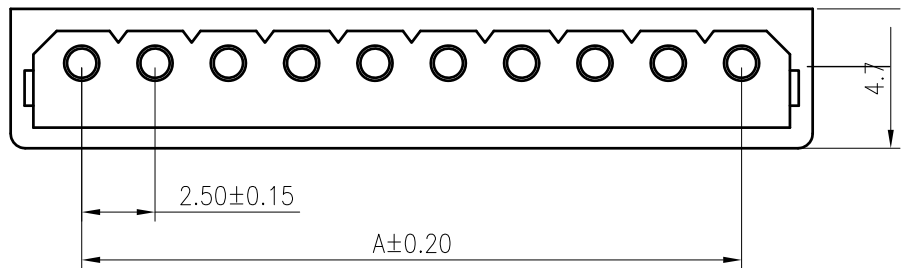

SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ Max.


Material: Nylon 66 UL 94V-0
 Suitable KR1258 series terminal
 Mate with KR1258 series wafer
 Ordering Code:



WWW.AsA-Elec.com

AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

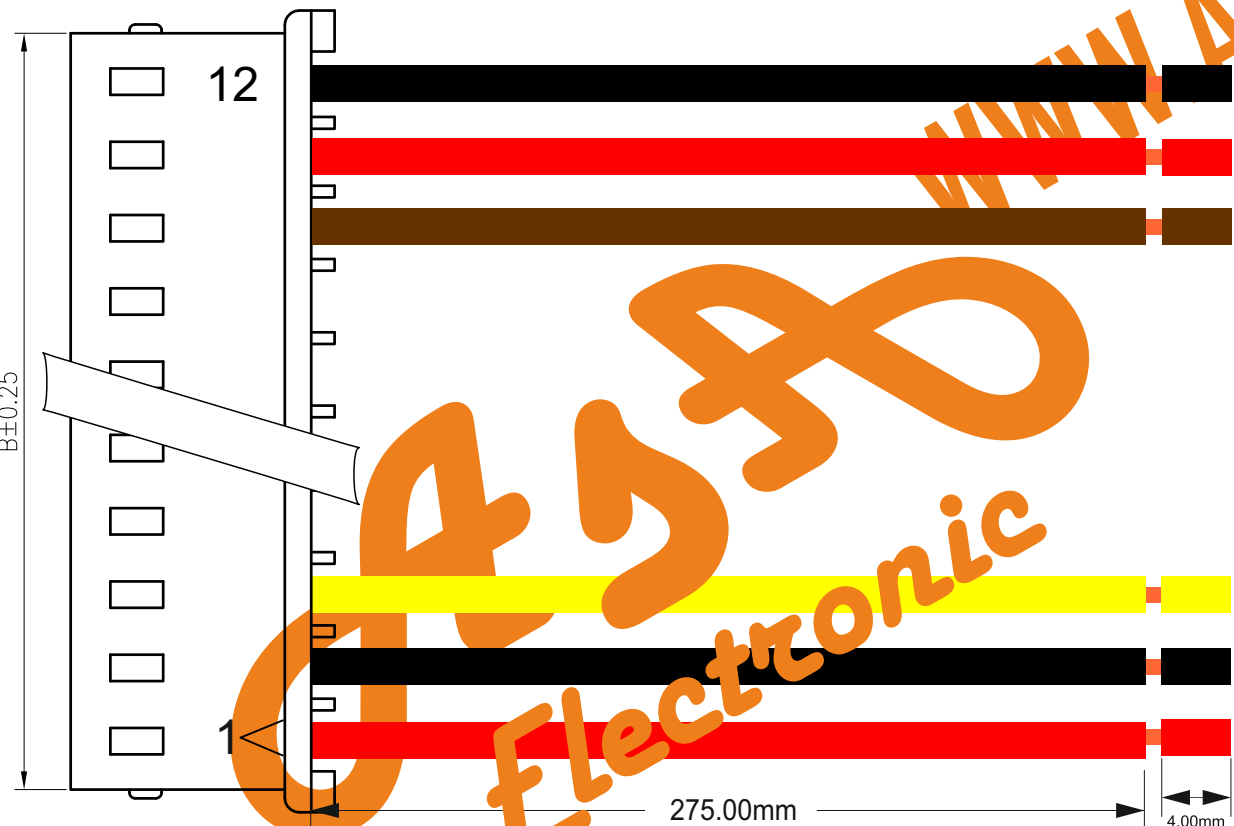

Pin	COLOR	Circuits	Dimensions	
			A	B
1	RED	2	2.50	5.80
2	BLACK	3	5.00	8.30
3	YELLOW	4	7.50	10.80
4	WHITE	5	10.00	13.30
5	GREEN	6	12.50	15.80
6	BLUE	7	15.00	18.30
7	ORANGE	8	17.50	20.80
8	VIOLET	9	20.00	23.30
9	GRAY	10	22.50	25.80
10	BROWN	11	25.00	28.30
11	RED	12	27.50	30.80
12	BLACK	13	30.00	33.30
		14	32.50	35.80
		15	35.00	38.30
		16	37.50	40.80

TOLERANCE		TITLE:		DRAWN	
X.X	±0.30	UNIT:mm SCALE:N/A SHEET:1/1 PROJECTION		CHECKED:	
X.XX	±0.20			APPROVED:	
X.XXX	±0.10			REV.:A3	
Angle	±2°				
MARK	REVISION DESCRIPTION	SIGNATURE	DATE		
1		2	3	4	5



Uniformly arrange the drawings

Shen 2022.01.08